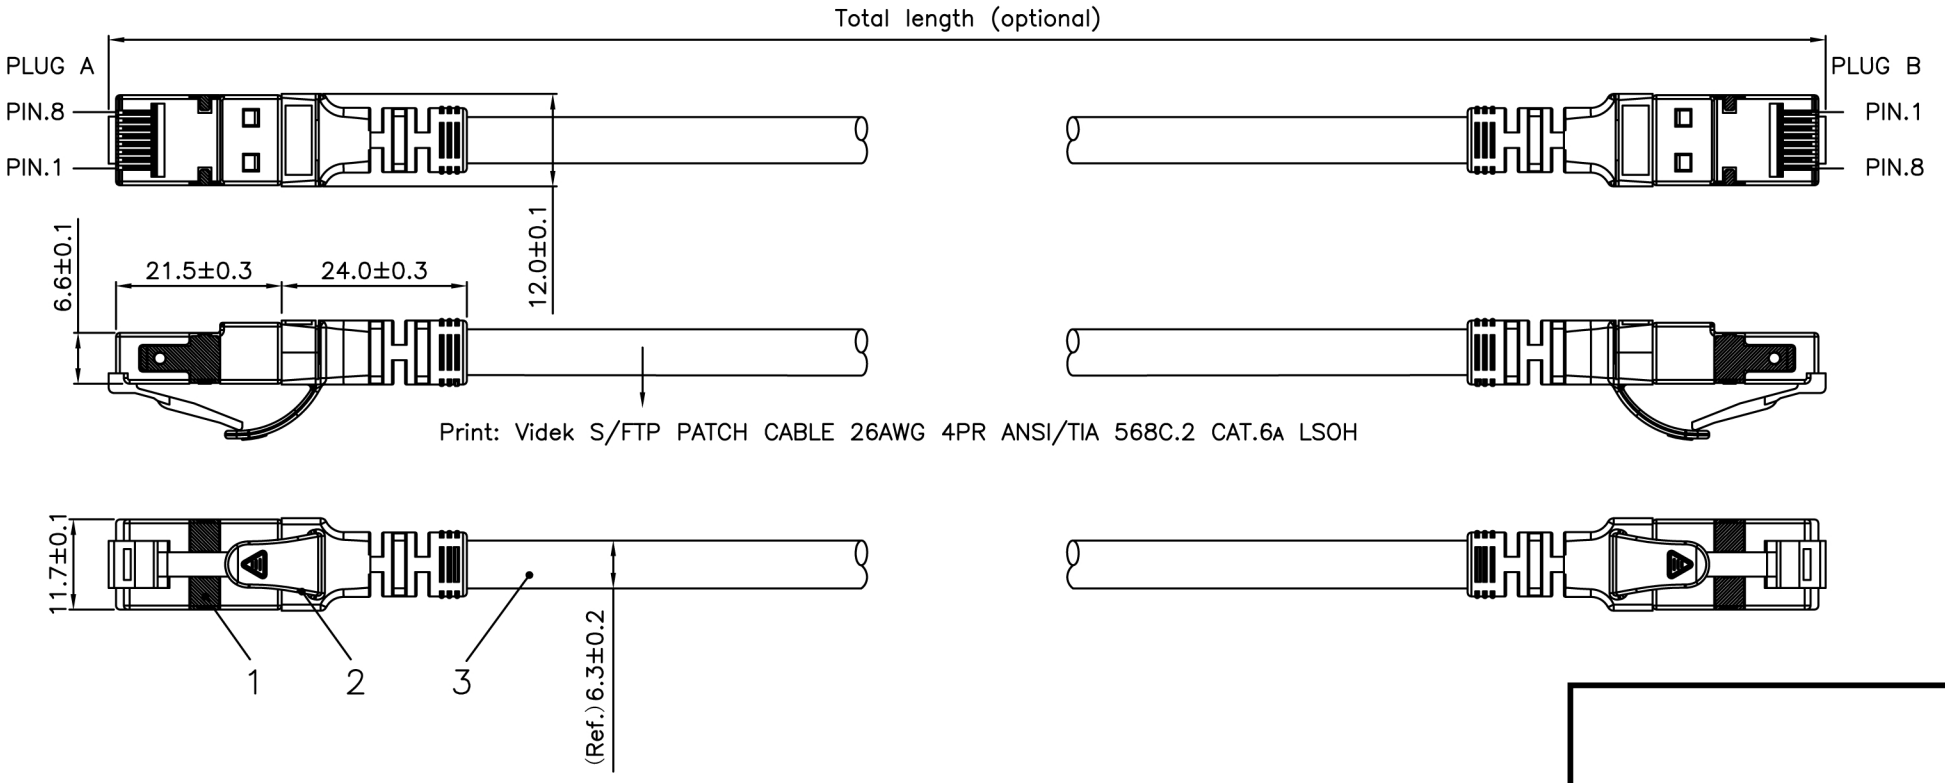

Specification :

Material :

1. RJ45 Plug
   1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.
   1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
   1-3. Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
   1-4. Shield : Bronze with Nickel plated.
2. SR : Boot.
3. Cable :
   3-1. Jacket : LSOH.
   3-2. Conductor : 26 AWG stranded copper.
   3-3. Isolation : PE.
   3-4. Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
4. Cable structure : S/FTP, 4 twisted pair.

GENERAL TOLERANCE OF DIMENSIONS	
X.XXX	±0.005
X.XX	±0.05
X.X	±0.1

Code: 2996AS-####
Description: Cat6a Booted LSZH 10g S/FTP Patch Cable

Videk
Est. 1978

Network Systems & IT Solutions
Tel: 020 8200 1122